


DIN 914

EN 24027
ISO 4027
PN 82315

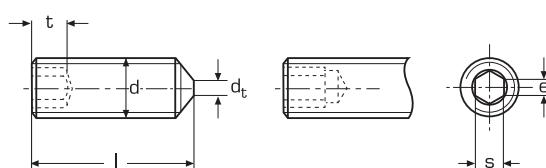

Wkręt dociskowy z końcem stożkowym,
z gniazdem sześciokątnym

A2 / A4

dt	-	-	-	-	-	0,90	1,40	1,90	2,40	3,25	4,25
t	1,7	2,0	2,0	2,5	3,0	3,5	5,0	6,0	8,0	10,0	12,0
e	1,003	1,427	1,730	2,300	2,870	3,440	4,580	5,720	6,860	9,150	11,430
s	0,9	1,3	1,5	2,0	2,5	3,0	4,0	5,0	6,0	8,0	10,0

d	M 2	M 2,5	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 16	M 20
----------	------------	--------------	------------	------------	------------	------------	------------	-------------	-------------	-------------	-------------

1	500	500	500								
4	500	500	500	500							
5	500	500	500	500	500	200					
6	500	500	500	500	500	200	200				
8	500	500	500	500	500	200	200				
10	500	500	500	500	500	200	200	200			
12	500	500	500	500	500	200	200	200	100		
14					500	200					
16	500	500	500	500	500	200	200	200	100	50	
18					500						
20			500	500	500	200	200	200	100	50	50
22					500	200					
25		500	500	200	200	200	200	100	100	50	50
30		200	200	200	200	200	200	100	100	50	50
35			200	200	200	200	100	100	100	50	50
40			200	200	200	200	100	100	100	50	50
45			200	200	200	200	100	100	100	50	50
50			200	200	200	200	100	100	100	50	50
55									100		
60					200	200	100	100	100	50	50
70									50	50	25
80									50	25	
90									50	25	
100									25		

Ilość szt. w opakowaniu jednostkowym