


DIN 916

EN 24029
ISO 4029
PN 82317

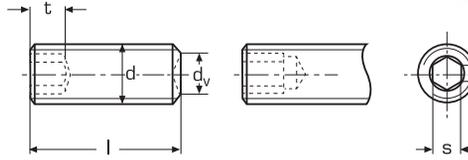

Wkręt dociskowy z końcem wgłębionym,
z gniazdem sześciokątnym
A2 / A4

dv	0,8	1,0	1,2	1,4	2,0	2,5	3,0	5,0	6,0	8,0	10,0	14,0
t		1,7	2,0	2,0	2,5	3,0	3,5	5,0	6,0	8,0	10,0	12,0
e		1,0	1,4	1,7	2,3	2,9	3,4	4,6	5,7	6,9	9,2	11,4
s	0,7	0,9	1,3	1,5	2,0	2,5	3,0	4,0	5,0	6,0	8,0	10,0

d	M 1,6	M 2	M 2,5	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 16	M 20
l 2	200											
3	200	500	500	500	500							
4	200	500	500	500	500	500						
5	200	500	500	500	500	500	200					
6	200	500	500	500	500	500	200	200				
8	200	500	500	500	500	500	200	200				
10		500	500	500	500	500	200	200	200	100		
12		500	500	500	500	500	200	200	200	100		
14						500	200	200				
16		500	500	500	500	500	200	200	200	100	50	
20				500	500	500	200	200	200	100	50	50
25				500	500	200	200	200	100	100	50	50
30				200	200	200	200	200	100	100	50	50
35					200	200	200	200	100	100	50	50
40						200	200	200	100	100	50	50
45							200	200	100	100	50	50
50							200	200	100	100	50	50
55										100		
60							200	200	100	100	50	50
70								200		50	50	25
80								200		50	25	25
90										50	25	25
100										50	25	25

Ilość szt. w opakowaniu jednostkowym