

DIN 965 PH


EN 27046

ISO 7046

PN 82208

Wkręt do metalu z łbem stożkowym,
z gniazdem krzyżowym PH

A2 / A4

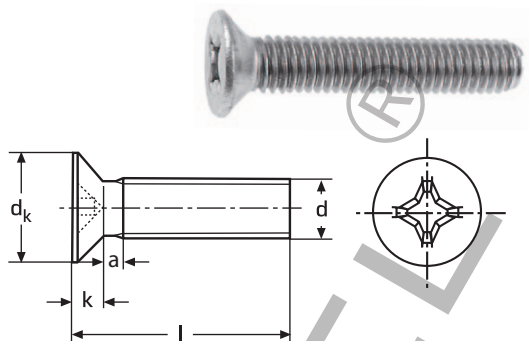

dk	3,0	3,8	4,7	5,6	7,5	9,2	11,0	14,5	18,0
k	0,96	1,20	1,50	1,65	2,20	2,50	3,00	4,00	5,00
a	0,7	0,8	0,9	1,0	1,4	1,6	2,0	2,5	3,0

d	M 1,6	M 2	M 2,5	M 3	M 4	M 5	M 6	M 8	M 10
I 2	1000								
3	1000	1000	1000						
4	1000	1000	1000	500					
5	1000	1000	1000	500	500				
6	1000	1000	1000	500	500	500			
8	1000	1000	1000	500	500	500	500		
10	1000	1000	1000	500	500	500	500		
12	1000	1000	1000	500	500	500	500	200	
14	1000		1000	500	500	500	500		
16	1000	1000	1000	500	500	500	500	200	100
18	1000	1000	1000	500	500	500	500		
20	1000	1000	1000	500	500	500	500	200	100
22			1000	500	500	500	200		
25			1000	500	500	500	200	200	100
28						500			
30				500	500	500	200	200	100
35				500	500	500	200	200	100
40				500	500	500	200	200	100
45				500	500	200	200	200	100
50				500	500	200	200	200	100
55				500	500	200	200		
60				500	500	200	200	200	100
65					200	200			
70					200	200	200	200	50
75					200	200	200		
80					200	200	200	200	50
85					200	200			
90					200	200	200	200	
95					200	200			
100					200	200	200	100	50
110							200	100	
120							200	100	
130							200	100	

Ilość szt. w opakowaniu jednostkowym