



DIN 7976

EN 21479

ISO 1479

PN 83101

Blachowkręt z łbem sześciokątnym
A2

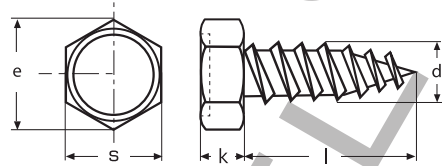

k	1,3	1,5	2,3	2,3	2,8	3,0	4,0	4,8	5,8
e	3,38	5,40	5,96	7,59	7,59	8,71	8,71	10,95	14,21
s	3,2	5,0	5,5	7,0	7,0	8,0	8,0	10,0	13,0

d	2,2	2,9	3,5	3,9	4,2	4,8	5,5	6,3	8,0
----------	-----	-----	-----	-----	-----	-----	-----	-----	-----

l 9,5	1000	1000	1000	1000	1000	1000			
13,0	1000	1000	1000	1000	1000	1000	1000	500	
16,0	1000	1000	1000	1000	1000	1000	1000	500	200
19,0	1000	1000	1000	1000	1000	1000	1000	500	200
22,0	1000	1000	1000	1000	1000	1000	1000	500	200
25,0	1000	1000	1000	1000	1000	500	500	500	200
32,0		1000	1000	1000	500	500	500	500	200
38,0		1000	1000	500	500	500	500	200	200
45,0		1000	1000	500	500	200	200	200	200
50,0			1000	500	200	200	200	200	200
60,0				500	200	200	200	200	200
70,0					200	200	200	200	200
80,0						200	200	200	
90,0						200	200	200	
100,0						200	200	200	
110,0						200	200	200	
120,0						200	200	200	

Ilość szt. w opakowaniu jednostkowym